
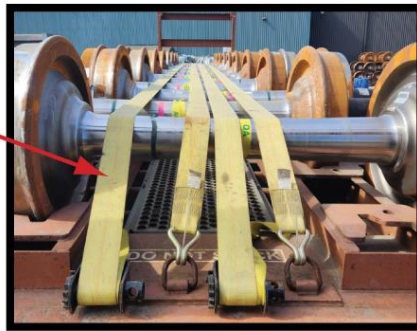


WHEELSETS ON SPECIALLY EQUIPPED FLAT RACK CONTAINER

RAC 17728  
New. 06-2024

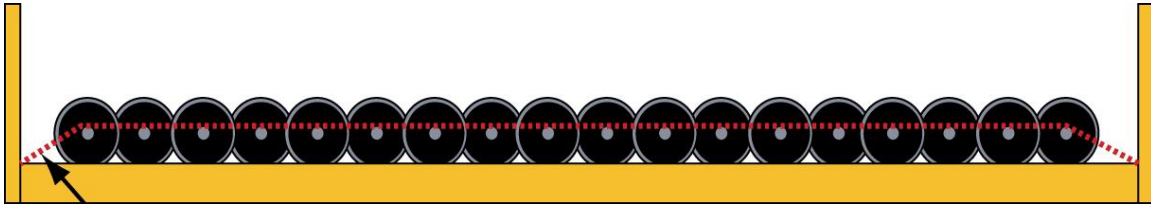

Item	No. of Pcs.	Description
A		Vacant
B	4 per load	Tie-down straps: 4-inch AAR approved cargo straps minimum 44 feet long with a MBS of 20 000LBS. Tighten straps with a winch bar. Secure hooks to D rings with cable ties or 16-gauge wire. Cables ties must have a minimum tensile strength of 120 LBS. Tie off any excess strap.

**NOTES:**

1. Suitable wheelsets:
  - 18 ea 6.5x12x36
  - 18 ea 6.5x9x36
  - 18 ea 6x11x33
  - 18 ea 6x11x28
2. Double stacking on this unit is not permitted.
3. Ensure the cargo straps stay with the container if not reloading immediately.